


axior | Bollard lights

axior 6608

- Bollard lights with swiveling head
- Housing made of powder-coated aluminum
- Luminaire glass made of UV-resistant PMMA
- Floor flange with cable entry
- Optional hot-dip galvanized earth section
- Housing color RAL7012, others on request
- Dimension H = 800 | B = 195 | T = 90 (mm)



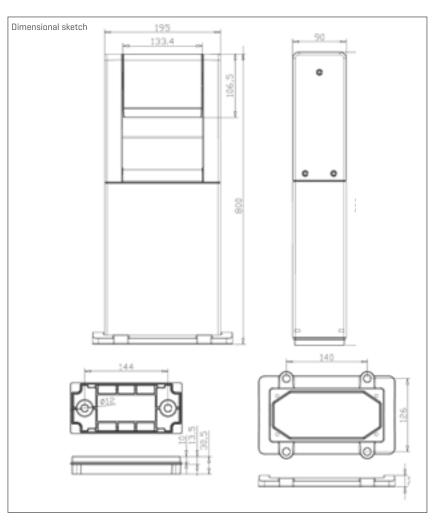

Designation	Lens (●)	Light Color (♦♦)	System performance	System performance typ.	LED assembly	System luminous flux
			(W)	(■■ W)		(lm)
66080900♦♦BA-SY	ohne	30/40	9	9	SMD	1155

Article number assignments | Explanation

Example: 1202**■■**00**♦♦**ME-**●**16

1202 Model number

System performance typ. e.g. 07 / 13 / 19

♦♦ Light color 27=2700K, 30=3000K, 40=4000K, AM=Amber

BA / ME BA=Basic / ME=Medium

Lens

AY HighPower LED MidPower LED

E.g.. 1202190030ME-S16

Model 1202, 19 Watt, 3000K, Medium, MidPower LED with S-Lens

TRS-STAR GmbH

Werner-von-Siemens-Str. 1 76297 Stutensee

Planning and technical sales Dipl. Ing. Frank Werz T +49 6233 347-125 werz@trs-star.com