


ENCORE | Ceiling Lights

ENCORE RL 6 / 10 / 15 / 22

- Extremely flat LED ceiling recessed downlight
- 32mm installation height
- 4 different sizes
- Mounting frame as an accessory
- Homogeneous light surface
- Opal wide diffuser disc
- Installation depth 32mm
- Integrated switchable converter
- External dimmable converter
- Tool-free installation
- Flicker-free light
- From size RL10 with mounting frame also as suitable for wall / surface-mounted luminaires



Designation	System performance typ. [W]	Light color	Luminous flux [lm]	Control
	■	◆		●
805602	6	3000K	510	switchable
805603	6	4000K	540	switchable
805604	6	3000K	510	DALI
805605	6	4000K	540	DALI
805596	10	3000K	850	switchable
805606	10	4000K	900	switchable
805607	10	3000K	850	DALI
805608	10	4000K	900	DALI
805597	15	3000K	1270	switchable
805609	15	4000K	1350	switchable
805610	15	3000K	1270	DALI
805611	15	4000K	1350	DALI
805598	22	3000K	1870	switchable
805612	22	4000K	1980	switchable
805613	22	3000K	1870	DALI
805614	22	4000K	1980	DALI

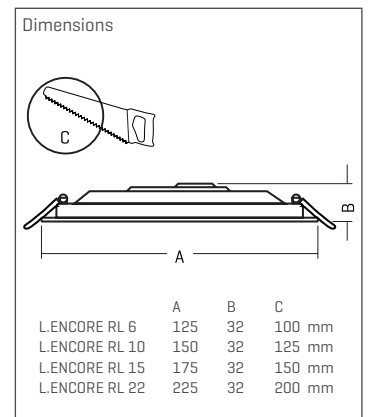

Article Number | Explanation

Example: HL-■S-HT●-02◆▲C

- HL Series
- System performance typ. [W]
- ◆ Light color
- ▲ Beam characteristic
- Control
- ▷ CRI
- * Dimensions [mm]
- × Equipment

For example: HL

HL Series, D=dimmable, 80/100 Watt, 5000K, A2=120°, 60=60°, TA=60°x90°, 8=CRI>80

TRS-STAR GmbH

Werner-von-Siemens-Str. 1
76297 Stutensee

Development, Planning
and Technical Sales
Dipl. Ing. Frank Werz

T +49 6233 347-125

werz@trs-star.com