
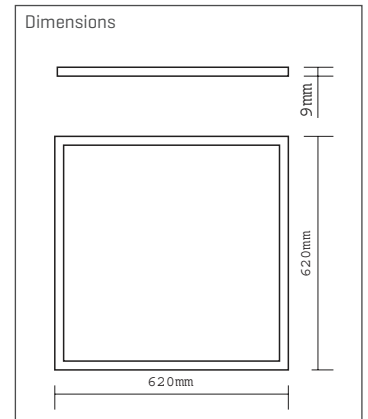


ENCORE | Ceiling Lights

ENCORE SL 62

- Ultra-flat square LED recessed ceiling light
- Recessed, surface-mounted, pendant version and wall lamp
- Opal uniformly wide diffuser disc
- Patented edge feed
- Flicker-free light
- Including external converter

- Modifications:
 - dimming interface
 - Accessories for types of assembly

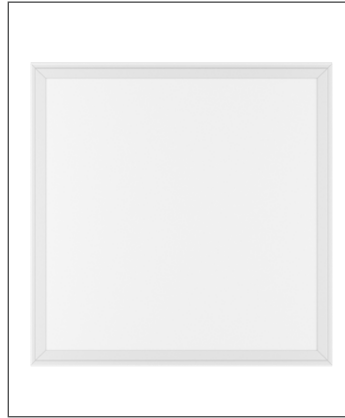


Product number	System performance typ. [W]	Light color	Luminous flux [lm]	Control
	■	◆		●
805594	45	3000K	4320	switchable
805633	45	4000K	4500	switchable
805635	45	6000K	4725	switchable
805632	45	3000K	4320	DALI
805634	45	4000K	4500	DALI
805636	45	6000K	4725	DALI


Equipment



Mounting frame

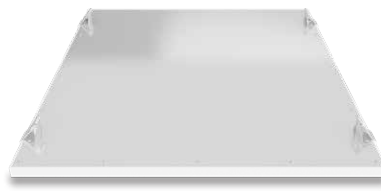

Installation clips

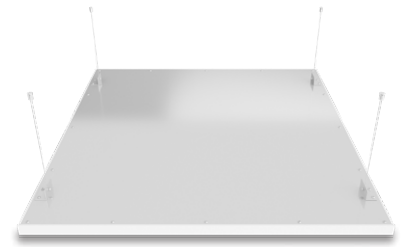

Pendulum set

Article Number | Explanation

Example: HL-■S-HT●-02◆▲C▷

- HL Series
- System performance typ. [W]
- ◆ Light color
- ▲ Beam characteristic
- Control
- ▷ CRI
- * Dimensions [mm]
- × Equipment

For example: HL

HL Series, D=dimmmable, 80/100 Watt, 5000K, A2=120°, 60=60°, TA=60°x90°, 8=CRI>80

TRS-STAR GmbH

Werner-von-Siemens-Str. 1
76297 Stutensee

Development, Planning
and Technical Sales
Dipl. Ing. Frank Werz
T +49 6233 347-125
werz@trs-star.com