


BARIS | Celling Lights



Baris surface-mounted

- Unique design
- For lighting offices, conference rooms and other representative rooms
- Lamp housing made of anodized aluminum
- Wall mounting
- Cover made of PS, opal or prismatic
- IP44
- Available in 3 different colors
- · Switchable or DALI dimmable

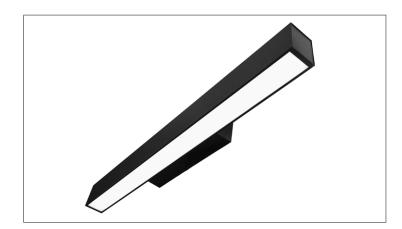

Product number	System perfor- mance typ. (W)	_	Equipment	Equipment	Luminous flux (lm)	Diffuser	Mounting	Dimensions L-B-H [mm]	EEI
		*	×					*	
9810■00♦*-*	16	3000/4000	120	gray / white /	1300-1700	opal / PRM	Anbau	579-40-53	A+

Article Number | Explanation

Example: HL-■S-HT●-02♦▲C)

HL Series

■ System performance typ. [W]

♦ Light color

▲ Beam characteristic

Control

CRI

***** Dimensions [mm]

x Equipment

For example: HL

HL Series, D=dimmable, 80/100 Watt, 5000K, $A2=120^{\circ}$, $60=60^{\circ}$, $TA=60^{\circ}x90^{\circ}$, 8=CRI>80

TRS-STAR GmbH

Werner-von-Siemens-Str. 1 76297 Stutensee

Development, Planning and Technical Sales Dipl. Ing. Frank Werz T +49 6233 347-125 werz@trs-star.com